

### PNEUMATIC SEALLESS STRAPPING TOOL FOR STEEL STRAP — FLAT SURFACE—

*TECHINCAL DATA / APPLICATIONS :*

Steel strapping tool with **pneumatic tension** and manual locking. Rugged construction for heavy duty applications. Available in three strap sizes: 13mm(1/2"); 16mm(5/8"); 19mm(3/4").

**TIN (titanium) coating on all wearing parts.**

Package type	Flat (minimum 150mm—6") Minimum diam. For round pack 1000mm (40")
Joint type	Sealless
Strap quality	Standar & high tensile max.=1100 N/mm2
Strap Width	from 13mm(1/2") up to 19mm (3/4")
Strap thickness Rmax=850 N/mm2	From 0,4mm up to 0,8mm (0.015"—0.031")
Strap thickness Rmax=1100 N/mm2	From 0,4mm up to 0,63mm (0.015"- 0.025")
Max. tension	5500 N
Weight	Around 5,3 Kg
Order code IMA DP	129.160.410

- \* STRONGER BODY
- \* ERGONOMIC AND SMART DESIGN
- \* EFFICIENT SEAL
- \* LOW FORCE TO OPERATE
- \* USER FRIENDLY



SEALLESS JOINT




PNEUMATIC TENSION



OPTIONAL  
STEEL CUTTING LEVER (COD.402011290)

- EASY AND FAST ADJUSTMENTS

- EASY ACCES TO CLEAN AND TO PERFORM MAINTENANCE

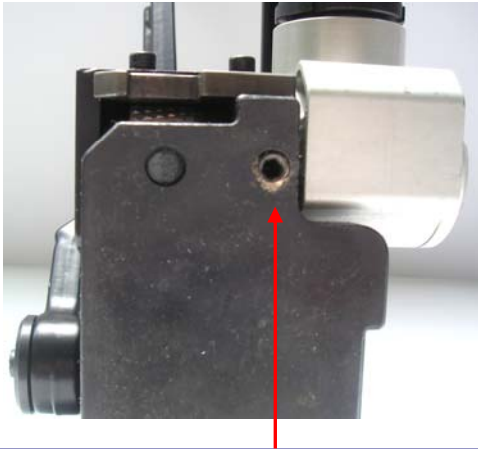

FEEDWHEEL GAP ADJUSTING SCREW- DETAIL



TURN THIS SCREW TO INCREASE OR DECREASE CUTTING AND SEALING



INSERT THE STRAP



PNEUMATIC TENSION



LOCKING



RELEASE